





## 防爆舱顶灯 EXPLOSION-PROOF PENDANT LIGHT 专利号 patent No.: ZL201130342663.9



CFY21-2  
CFY21-2E



CFY41-2  
CFY41-2E

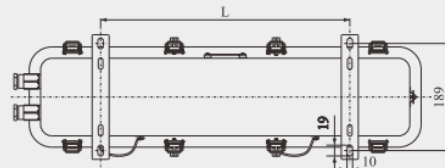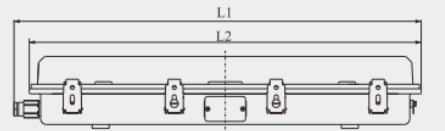

	L	L1	L2
CFY21-2	440	719	692
CFY41-2	800	1323.5	1294

适用范围 The scope of application	适用于舰船、石油开采平台、化工及具有爆炸性气体的1区或2区场所照明。 Applied to illumination in ships, oil extraction platforms, chemical industries and Zone 1 or 2 filled with explosive gas.			
型号 Type	CFY21-2	CFY21-2E	CFY41-2	CFY41-2E
防爆标志 Explosion-proof mark	Ex emb IIC T5 Gb	Exd emb IIC T5 Gb	Ex emb IIC T5 Gb	Exd emb IC T5 Gb
额定电压 Rated voltage	AC110V 60Hz、AC220V 50/60Hz			
功率 Power	2x20W		2x40W	
功率因数 Power factor	≥0.85			
光源 Illuminant	荧光灯 Fluorescent lamp			
灯座 Lamp holder	G13			
防护等级 Protection class	IP56			
电缆外径 Cable diameter	Ø10~Ø12			
安装方式 Installation	吸顶式 Ceiling type			
环境温度 Ambient temperature	-20℃~+45℃			
灯体材质 Light body material	钢, 不锈钢 Stainless steel, steel			
灯罩材质 Shade material	PC			
重量 Weight	5.5Kg		9.5Kg	
备注 Remarks	带E的为DC24V应急, 功率为3WLED。The one with E is DC24V emergency with power of 3WLED.			