



船用铜质接插件 MARINE BRASS CONNECTOR




CTS2-2
船用铜质大电流水密插头
Marine Brass High-current Watertight Plug

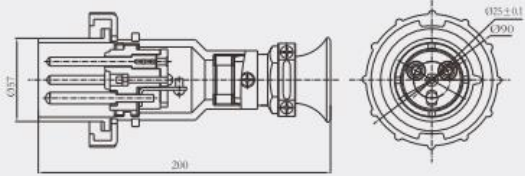

CTS3-2
船用铜质大电流水密插头
Marine Brass High-current Watertight Plug



CTS3-3
船用铜质大电流水密插头
Marine Brass High-current Watertight Plug

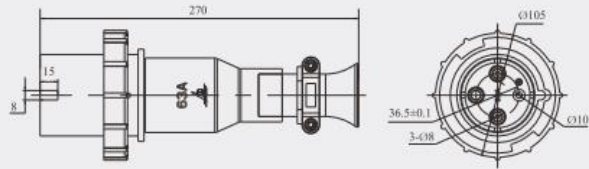

适用范围 The scope of application	适用于舰船和其它对防护等级要求较高的场所，供交直流低压电器线路连接和断开用。 Applicable to ships and other places requiring high protection level, for the exchange of low-voltage DC electrical connection and disconnection.		
型号Type	CTS2-2/15	CTS3-2	CTS3-3
额定电压Rating voltage	AC380/440V/220V	AC380/440V	AC380/440V
额定电流Rating current	32A	32A	63A
防护等级Protection class	IP56	IP56	IP56
电缆外径Cable outside Diameter	Ø18-Ø20	Ø18-Ø20	Ø18-Ø20
重量Weight	1.6kg	1.6kg	2.2kg
材质Material	铜 Brass		
标准Standard	CB3897-2011		